CISGINDUSTRIAL


USB 2.0 20-Port Charge Hub

WA-UCH-20 is a 20-port USB Hub with Charger, a solution for charging or sync of several iPads, iPhones iPods and USB charging devices operating simultaneously this is a perfect tool to eliminate the jumble of wires and chargers and also is ideal for large capacity USB station in-house for automated duplication tasks. Places such as school's class room, businesses conference or meeting in organizations.

Features

- Charges or syncs up to 20 iPads, iPods, iPhones or other USB-charged in charge mode devices, providing each USB port
 with the optimum charge level for each device (up to 1.1A, as needed for quick-charging iPads)
- Will also charge virtually any other device that can be charged through a powered USB port
- Supports High Speed 480Mbps, full speed 12Mbps and low speed 1.5Mbps operation
- Fully compatible with all USB compliant devices
- Twenty (20) Hi-Speed USB 2.0 downstream ports
- Over-current detection and protection
- Surge & ESD Protection
- Extends up to optimum 40 USB devices by connecting cascade port with aother USB 2.0 charge hub(s)
- 1. Note 1 Support optimum 26 (A to Z) storage devices in Windows System.
- 2. Note 2 Support optimum 30 iOS devices by Apple Configurator provided by Apple in Mac System.
- 3. Note 3 With the USB 3.0 interface, the maximum cascading level may differ according to the endpoint buffer capacity of specific USB 3.0 host controllers. Should the device be unidentifiable, please switch to the USB 2.0 interface instead.
- Supports Windows OS: 98SE/ME/2000/XP/Vista/7/8, Mac OS 8.6/9.x/10.x or higher

Model No.		WA-UCH-20
Chip		Terminus
Speed		480/12/1.5 Mbps
USB Specification		USB 1.1/2.0 compliant
Current per Port		5VDC 1100 mA
Connector	Upstream	USB B Female
	Downstream	USB A Female x 20
	Cascade	USB A Female
Power Mode		External power adapter
LED	Charge Mode	Red Color x 20
	SYNC Mode	Orange Color x 20
Cable Length		1.8m
Dimension (L x W x H)		268 X 102 X 40 mm

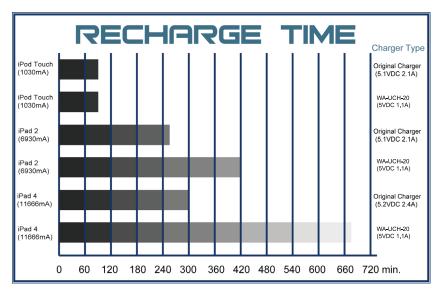

Specifications are subject to change without notice

